



SSD
Smart Strip Diffuser



Smart Strip Diffuser

Data sheet

Smart Strip Diffuser

Materials

Membrane
Polyurethane

Basic profile
PVC regranulate


Air feed
Polyurethane

Operating Conditions

Water temperature
< 95 °F


Air temperature
< 140 °F

Max. pressure loss
42 inches W.G.

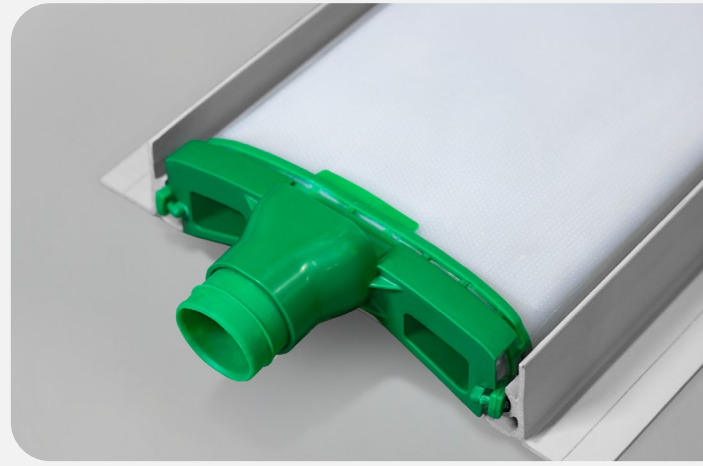


Dimensions

	A [ft]	B [ft]	Airfeed [in]	Height [in]	Weight [pd]	Active Area [ft ²]	Airflow range [scfm]
SSD1500	5.51	4.92	1.26	1.81	9.9	2.58	0.9 - 12.5
SSD2000	7.15	6.56	1.26	1.81	13.2	3.44	1.3 - 16.2
SSD2500	8.79	8.20	1.26	1.81	16.5	4.3	1.6 - 20
SSD3000	10.43	9.84	1.26	1.81	19.8	5.17	1.9 - 12.5
SSD3500	12.07	11.48	1.26	1.81	23.1	6.03	2.2 - 28.7
SSD4000	13.71	13.12	1.26	1.81	26.5	6.89	2.5 - 32.4

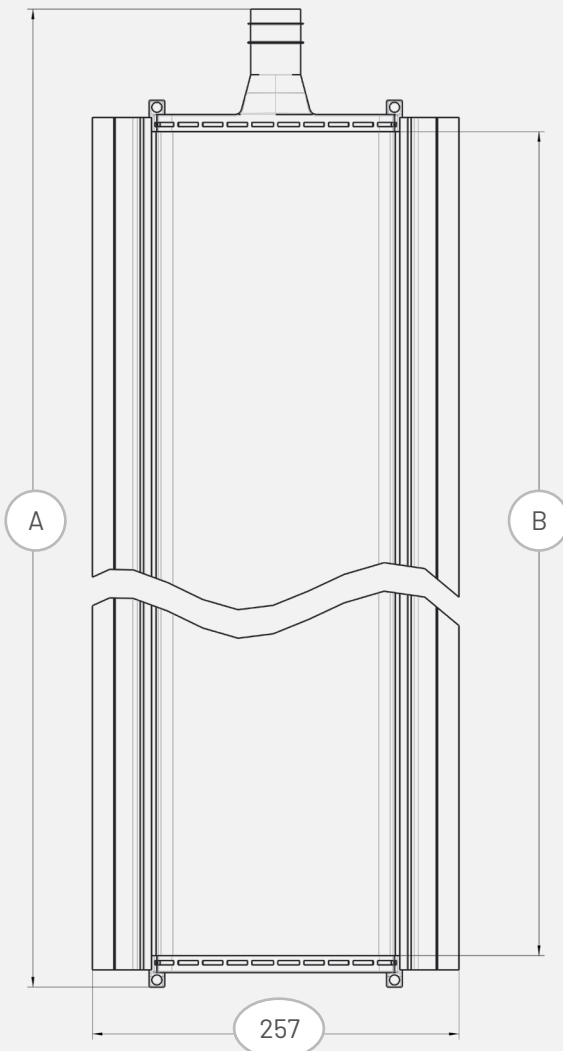

SSOTE and headloss for the SSD

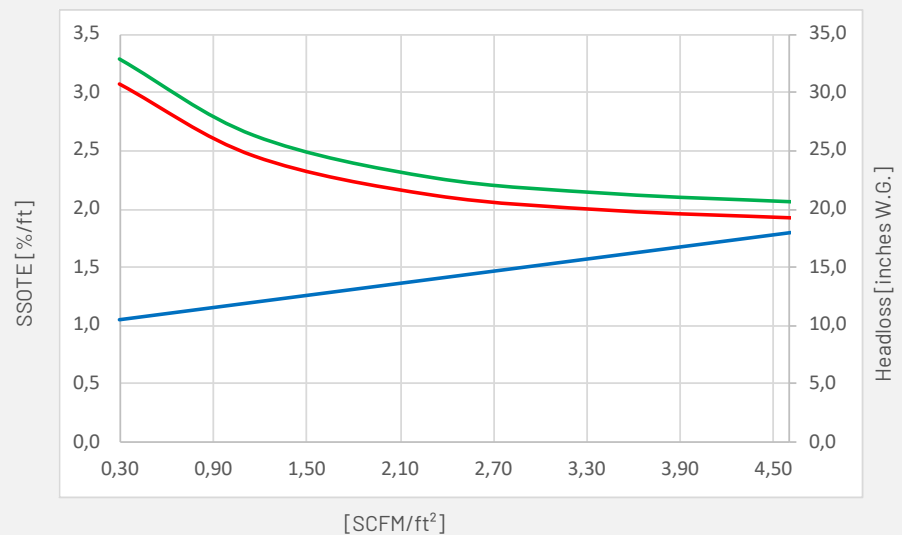



info@aquaviva-technology.com
www.aquaviva-technology.com

Aqua Viva Technology, Inc.
115 Koomler Dr.
La Porte, IN46350
USA

Disclaimer

We exclude any liability for the information and product presentations provided.
For contents of a technical nature, these are based on the status of their
publication. Existing copyrights and rights to names remain unaffected.